Rheem Electric 250L
491250,492250

5 - 8	Indoor/ Outdoor
PEOPLE[3]	INSTALLATION

Features & Benefits

- Easy retrofit
- Dual handed inlet and outlet fittings
- Durable Rheem Ultranamel®
- Thicker sacrificial anode
- Sinlge element model available 1.8, 3.6 & 4.8kW- 491250
- Twin element model available 3.6 & 4.8kW - 492250
- Australian made
- 12 year cylinder warranty[1]

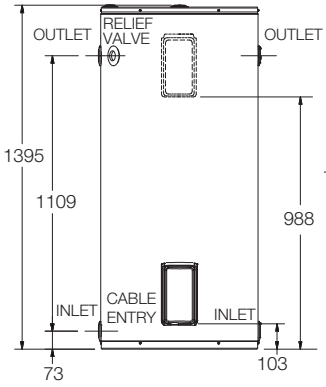



MODEL	491250 492250
Hot Water Delivery (L)	250
Element Rating (kW)	1.8, 3.6, 4.8
Relief Valve Pressure (kPa)	1000
Expansion Control Valve (kPa)	850
Max Water Supply Pressure:	
with ECV (kPa)	680
without ECV (kPa)	800
Water Connections	Rp 3/4
Approx. Weight (packaged) kg	82

Tap QR code for installation instructions