


DOUGLAS & CO

EST. 1880

BF 10-H

CONTINUOUS FLOW HOT WATER INTERNAL BALANCED FLUE

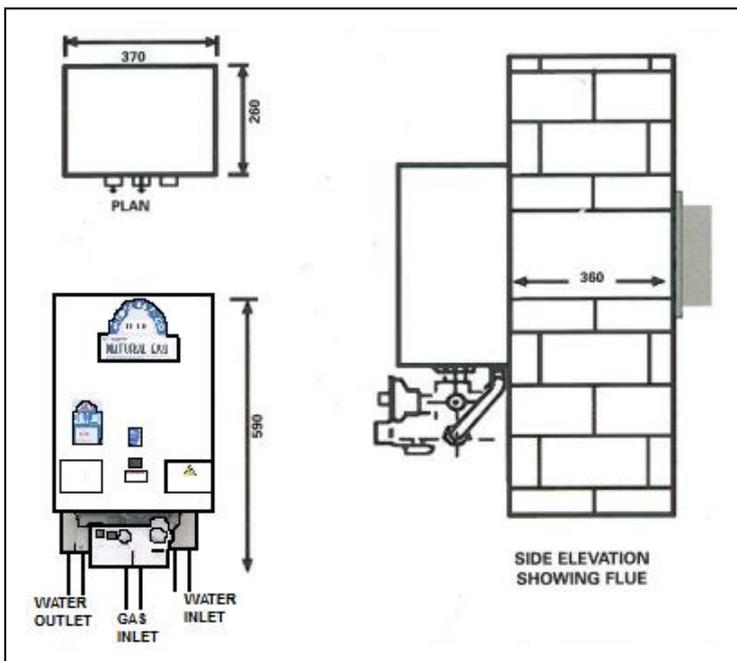

TECHNICAL INFORMATION


Heat Input	70 M.I./Hr.
Thermal Efficiency	78.75%
Water Flow rate 30 degrees above ambient	0.14 L/S
Water Flow rate 20 degrees above ambient	10.2/Min
Max. Operating Head	500KPa
Min Operating head	70KPa
Water Inlet	15mm
Water Outlet	15mm
Gas Connection	20mm
A G A Star Rating	5.5

COMPACT & CONVENIENT

- Replaces any other balanced flue hot water service
- Install anywhere, even under the sink
- Totally install flue from inside the building

QUALITY & EFFICIENCY

- Modulating gas control
- Adjustable Temperature control
- Made in Australia

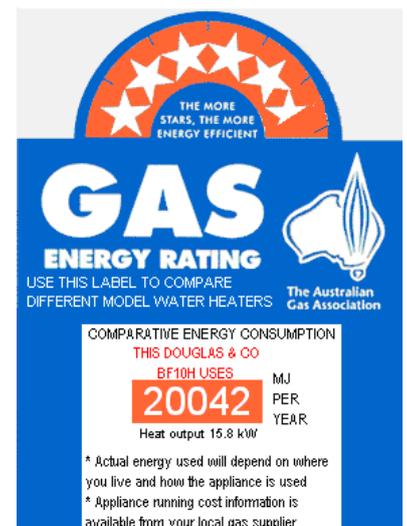

DOUGLAS & CO
1/47 Rusdale Street
Knoxfield Vic 3180
Phone (03) 9764 8433

Distributed by:



The WaterMark
AS 3498
LN: WMKA 00605
Standards Australia

DOUGLAS & CO

EST. 1880

BF 10-H

CONTINUOUS FLOW HOT WATER
INTERNAL BALANCED FLUE

