



340 STAINLESS STEEL

RHEEM 5 STAR GAS HOT WATER



GAS

3-6
PEOPLE

MAINS
PRESSURE

12 YEAR
CYLINDER
WARRANTY¹



RHEEM 340 STAINLESS STEEL

- 5 Star energy efficiency
- Stainless Steel Cylinder
- 185L/hour hot water recovery² – enough for large families
- 340L first hour hot water capacity²
- Mains pressure – to service multiple hot water demands at once
- Significantly lighter than comparable enamelled steel cylinder water heaters, for easier installation
- No anode - saves ongoing maintenance costs
- Natural gas
- Australian Made
- 12 Year cylinder warranty¹



COMES ON STEADY, HOT AND STRONG

INSTALL A





340 STAINLESS STEEL

THE BEST IN GAS HOT WATER

Rheem is synonymous with the best in gas hot water, providing superior energy efficiency and hot water recovery.

Now Rheem adds even more innovation and performance with the addition of Stainless Steel to the gas water heater range.


THE STAINLESS STEEL ADVANTAGE

The stainless steel cylinder in the Rheem 340 SS model not only offers purity and durability, it can help save money in the long run.

- Can resist corrosion for longer than conventional vitreous enamel cylinders
- No sacrificial anode, for reduced lifetime service costs
- Superior energy efficiency

Rheem Stainless Steel water heaters are not recommended for installation in some areas. Refer to the Rheem website www.rheem.com.au for details of areas not recommended and for which product is not covered by warranty.

SPECIFICATIONS		8A0340NO STAINLESS STEEL
AGA Star Rating Index		5 Stars
Suitable for Number of People		
Moderate Climate		3-6†
Cool Climate		3-5†
Storage Capacity	Litres	155
Recovery Rate at 45°C Rise	Litres/Hr	185
First Hour Capacity ²	Litres	340
Hourly Gas Consumption		
Natural Gas	MJ/Hr	40
Approx. Weight Empty	kg	65
Approx. Weight Full	kg	220
Relief Valve Setting	kPa	1400
Expansion Control Valve Setting	kPa	1200
Max. Water Supply Pressure		
Without ECV	kPa	1120
With ECV	kPa	960
Inlet Water Connection LHS		Rp $\frac{3}{4}$ " (20mm) Female
Outlet Hot Water Connection TOP		Rp $\frac{1}{2}$ " (15mm) Female
Gas Connection		$\frac{1}{2}$ " Flared Compression
Installation Type		External Only
Warranty (Cylinder) ¹		12 Years
Dimensions		
A (Height)	mm	1635
B (Width) Approx.	mm	520
C (Depth) Approx.	mm	610
D	mm	330
E	mm	360
F	mm	840
G	mm	415
H	mm	52

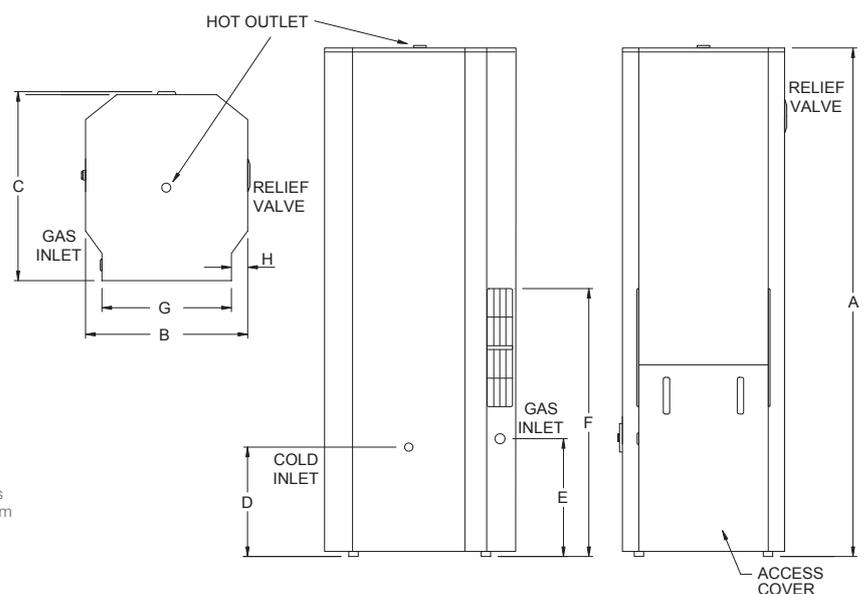

1. Rheem 340 Stainless Steel Warranty: 12 year cylinder warranty, 3 years labour on cylinder, 1 year parts and labour warranty on all other components for domestic (non-commercial) installations. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view it at www.rheem.com.au/warranty

2. First hour capacity is the storage capacity plus nominal first hour recovery rate at 45°C temperature rise using Natural Gas, based on a cold water temperature of 15°C.

†Guide only, subject to individual hot water consumptions patterns.

Materials and data are subject to change without notice.

©Registered Trademark of Rheem Australia Pty Ltd.

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508, Silverwater, New South Wales 2128, Australia.

Rheem_MKT_340SS_Gas_Storage_Spec_Sheet_10/2019

